

**DRILLING DEPTH RATING:** 20,000'

**LIGHTSHIP:**


(Overall Average Draft) 6'6"  
 (Towing Height) 62.6'

**BARGE DIMENSIONS, SPECIFICATIONS:**

Length 205'  
 Beam 50'  
 Hull Depth 14'  
 Key Slot 57' x 10'  
 Main Deck to Rotary Pan 24'  
 Main Deck to Top of Rotary 30'  
 Main Deck to Bottom of Trolley Beams 22'  
 Accommodations 38 bunks  
 Helipad 46' x 44'

**CAPACITIES:**

Potable water 40,000 gallons  
 Drill water 5,000 barrels  
 Mud tank capacity 1,435 barrels  
 Fuel 40,000gallons  
 Bulk Barite Storage 3,000 sacks  
 Tear-Drop Bulk Barite 72 sks

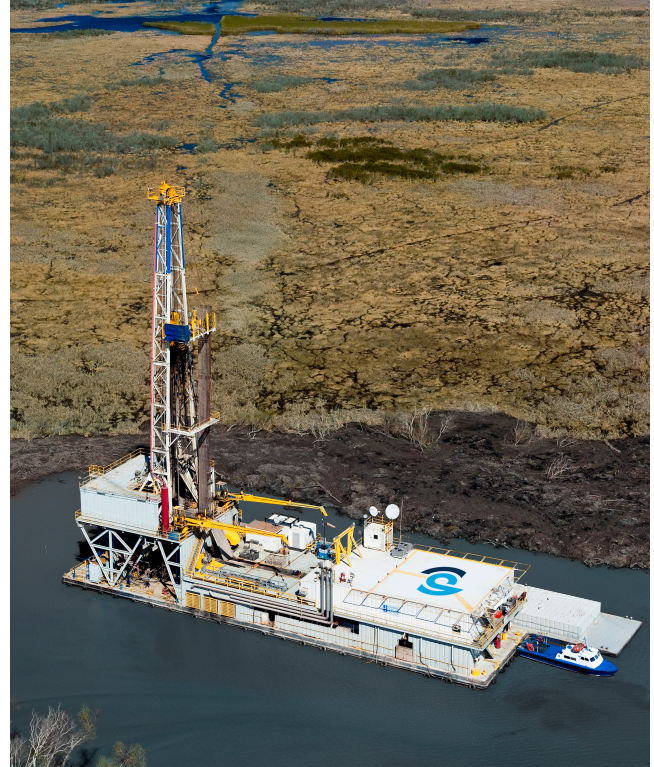

**Equipped for full zero discharge operations for work within environmentally sensitive areas.**

**DRAWWORKS:**

- Skytop Brewster NE-12 (2000 HP) w/7838 Elmago electric brake, driven by (2) GE 752 electric motors (2000 input HP)

**MUD PUMPS:**

- (2) C. E. FB-1600 (1600 HP) triplex pumps driven by (2) GE 752 (2000 HP) electric motors.  
 - 5,000 psi working pressure Mud System

**MAST AND TRAVELING EQUIPMENT:**

- 142' Skytop Brewster cantilever mast with a static hook load of 1,000,000 lbs  
 - 500T Skytop Brewster 7 sheave crown grooved for 1 3/8" drill line  
 - 500T traveling block  
 - 500T CanRig top drive  
 - 500 T 27½" rotary table  
 - (1) 5000 psi wp Rotary Hose

**WELL CONTROL EQUIPMENT:**

- (1) 13 5/8" 5,000 psi Annular BOP  
 - (1) 13 5/8" 10,000 psi Cameron Type U Single Ram BOP  
 - (1) 13 5/8" 10,000 psi Cameron Type U Double Ram BOP w/ LBSBTB blind shear rams  
 - (1) 13 5/8" 10,000 Drilling Spool  
 - (1) 200 gallon, 7 Station Koomey accumulator and closing unit  
 - (1) 10,000 psi Choke Manifold

**Note: Other BOP equipment available from stock**

*Note: equipment subject to client-specific requirements*



Energy. Well engineered.

Find out more at [parkerwellbore.com](http://parkerwellbore.com)

©2021 Parker Wellbore. All Rights Reserved.



1110 Unifab Road  
 New Iberia, Louisiana 70560  
 Tel: 337.364.3122 Fax: 337.364-3292  
 Uncontrolled if printed • Date of issue 10/28/08

**MUD HANDLING/SOLIDS CONTROL:**

- (2) Shale shakers
- Desander
- Desilter
- Degasser
- Mud Agitators
- Mud mixing pumps
- (3) Derrick FLC 513
- (3) Derrick 10" Hydroclone
- (20) Derrick 4" Hydroclone Brandt DG10
- (2) Brandt MA-10, (2) Brandt MA-7.5, (2) Brandt MA-5
- (2) 6 x 8 centrifugal pumps
- (1) 6 x 5 centrifugal service pump

**POWER & ELECTRICAL SYSTEM:**

- (3) 3512B Caterpillar (1476 HP) engines
- (3) KATO 1365 KW generator sets
- IPS Three Bridge SCR system

**TUBULARS:**

- 5" drill pipe, S-135 w/4 1/2" IF connections, w/handling tools
- 15 joints of 5" heviwate drill pipe, w/4 1/2" IF connections
- 15 total drill collars (8" w/ 6 5/8" REG conn., 7 1/4" w/5 1/2" REG conn., 6 1/2" w/4 1/2" XH conn.)
- (1) pipe barge for Contractor's tubulars

**MISCELLANEOUS EQUIPMENT:**

- (1) 20 Ton hydraulic crane
- (1) 10 Ton hydraulic crane
- (2) 50 bbl. trip tanks
- (1) 300 amp welding machine
- (1) Quincy Bulk air compressor
- (1) Quincy Model 5120 cold start air compressor
- (2) Quincy Model 245 air compressors
- (1) 10 X 30 Cantilever Deck - Shakers
- (1) 12 X 30 Cantilever Deck - Pipe Rack
- (1) .092 Wireline unit

