

DRILLING DEPTH RATING:

Drilling 25,000' w/5" drill pipe

LIGHTSHIP:

(Towing Draft) 8'
(Towing Height) 69'

BARGE DIMENSIONS, SPECIFICATIONS:

Length	209'
Beam	54'
Hull Depth	14'
Posted Deck Height	14'
Key Slot	40' x 10'
Main Deck to Rotary Pan	28'
Accommodations	50 bunks
Helipad	68' x 50'

CAPACITIES:

Potable water	72,000 gallons
Drill water	6,720 barrels
Mud tank capacity	1,440 barrels
Fuel	65,800 gallons
Bulk Barite	4,000 sacks



Equipped for full zero discharge operations for work within environmentally sensitive areas.

DRAWWORKS:

- Oilwell E-2000 (2000 HP) w/ 7838 Elmago electric brake, driven by (2) GE 752 electric motors (2000 HP)

MUD PUMPS:

- (2) Oilwell A-1700PT (1700 HP) triplex pumps driven by (2) GE 752 electric motors (2000 HP)

MAST AND TRAVELING EQUIPMENT:

- 148' Pyramid cantilever mast w/static hook load of 1,330,000#
- 750T Pyramid 7 sheave crown
- 750T block
- 650T CanRig Top Drive
- 27½" Oilwell rotary table driven by GE 752 electric motor

WELL CONTROL EQUIPMENT:

- (1) 5,000 psi annular wp BOP
- (1) 13 5/8" 10,000 psi wp BOP rams
- (1) 13 5/8" 10,000 psi wp BOP Double rams w/blind shear
- (1) 10,000 lb kill manifold

Note: Other BOP equipment available from stock



Note: equipment subject to client-specific requirements

Energy. Well engineered.

Find out more at parkerwellbore.com

©2021 Parker Wellbore. All Rights Reserved.

1110 Unifab Road
New Iberia, Louisiana 70560
Tel: 337.364.3122 Fax: 337.364-3292
Uncontrolled if printed • Date of issue 1/25/08

MUD HANDLING/SOLIDS CONTROL:

- Shale shaker (2) Derrick Flowli Cleaner Plus (1) Derrick Hy-G Dryer
- Desander Derrick 3/10
- Desilter Derrick 4/20
- Degasser Brandt DG-10
- Mud Agitators (4) Brand MA-20
- Mud mixing pumps (1) Bran MA-25
- (3) 6 x 8 centrifugal pumps

POWER & ELECTRICAL SYSTEM:


- (4) D-399 Caterpillar (1215HP) engines
- (4) KATO 1030 kw generator sets
- IPS Four Bay SCR system

MISCELLANEOUS EQUIPMENT:

- (1) 40 Ton Nautec crane
- (1) 15 Ton Sea King crane
- (1) 100 bbl. trip tank
- (2) 400 amp welding machines
- (2) Quincy Model 245 electric air compressor
- (1) Quincy Model QSI 60 LP bulk air compressor
- (1) Quincy Model cold start air compressor
- (1) 10 X 30 Cantilever- Shakers
- (1) 12 X 30 Cantilever – Port side
- (1) 14 X 24 Cantilever – Starboard side

TUBULARS:

- 5" drill pipe w/handling tools
- 15 joints of heviwate
- 15 drill collars (8", 7 1/4", or 6 1/2")

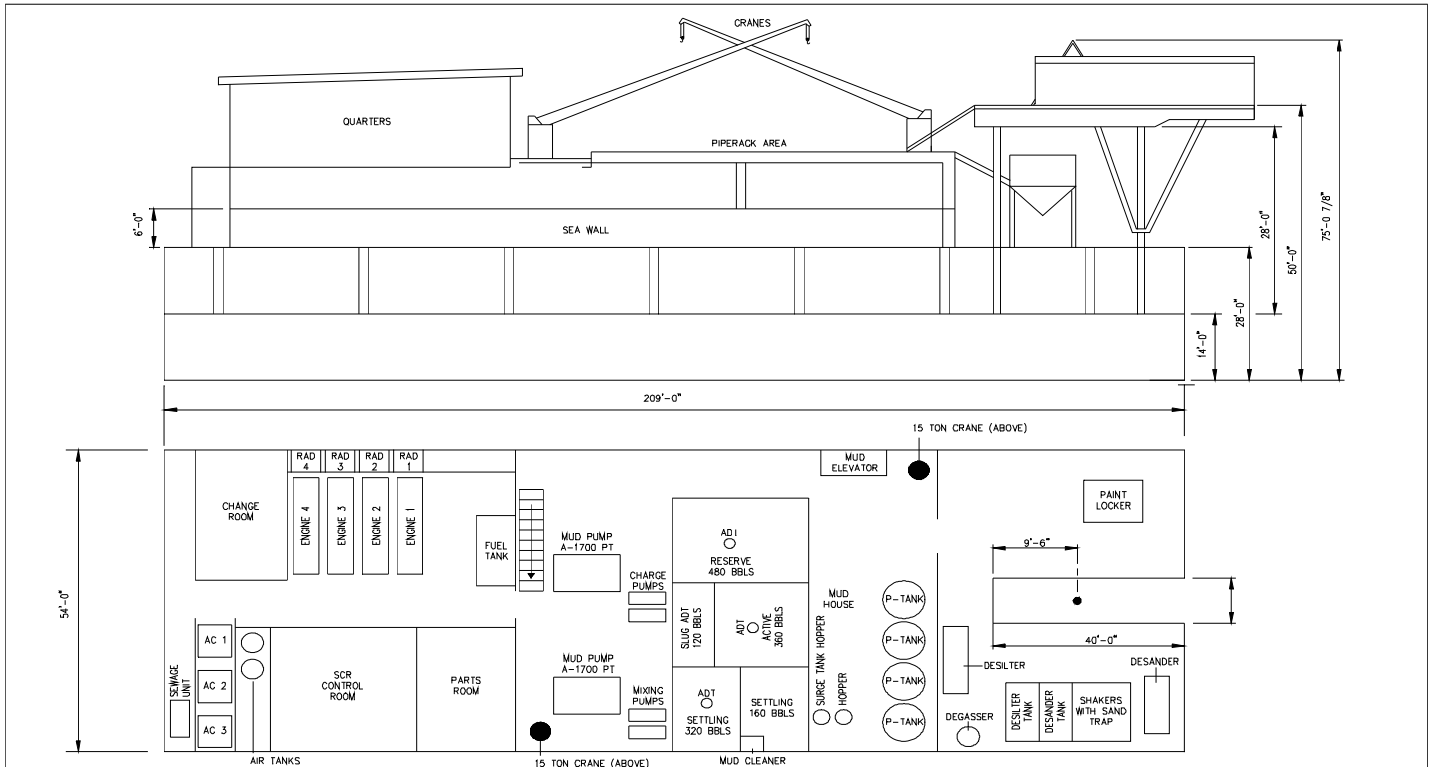

1110 Unifab Road • New Iberia, Louisiana 70560 •

<http://www.parkerwellbore.com>
 Tel: 337.364.3122 Fax: 337.364-3292

Uncontrolled if printed Date of issue 01/25/08

Note: Equipment subject to client-specific requirements. No part of this document may be reproduced or transmitted without prior consent of Parker Drilling. Rev 03/19